

FOXJET[®]
AN ITW COMPANY



LinxSeries[®]₅₉₀₀

Continuous Inkjet Printing

Inkjet
Technology by

LINX



Features and Benefits:




- **Large color user interface** saves time creating and editing messages with prompted coding fields for fast editing and easy message creation
- **3 Line Coding**, USB message sharing and up to 1,000 messages stored as standard
- **SureFill mistake proof refill system** reduces errors, downtime and the risk of using incorrect fluids.
- **FullFlush self-cleaning technology** keeps the printhead clean and your production line moving.
- **Predictable maintenance scheduling** with service intervals of up to 6000 hours.
- **IP55-rated** with a stainless steel enclosure and no doors to open when refilling – for reliable operation even in washdown environments.

Dimensions:


Front Elevation



Top Elevation

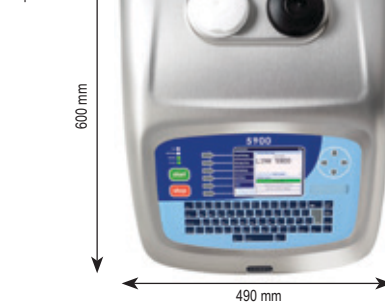

Side Elevation

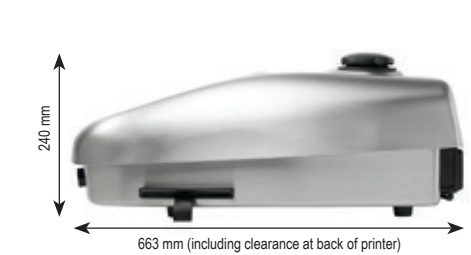

Printer Specifications:

Printhead with 2M Conduit, Standard	MK7
Printhead/Conduit Options	2M, 4M, 90D, Short Reach 90D
Max Lines of Print	3
Character Height Range	0.06" - 0.42"
Max Speed; Single Line Print	1443 fpm
Ink Range	Dye Based
Automatic Date Codes, Sequential Numbering	Yes
Timed Messages	Yes
Graphics/Logo Printing	No
Barcodes, Common Linear & 2D Datamatrix	No
Memory Capacity (# of Messages)	1000
Ingress Protection Rating	IP55
Base and Enclosure	Stainless Steel
Operating Temperature Range	41-113°F
Humidity Range	90% Max
Power Supply	100-230V 50/60 Hz
Power Consumption	200W
Weight	46 lbs
Regulatory Approvals	TUV/GS, CE Mark, FCC, RoHS, EAC, NRTL

Connections / Interfacing Specifications:

Touch Screen	No
Logojet PC Based Message and Logo Creation Software, and DDE Driver Software	Optional
RS232 Port	Yes
Ethernet Option	Yes
Parallel I/O Option	Yes
USB Port for Message and Printer Setting Back Up and Restore	Yes
Shaft Encoder, Product Detector, External Single Stage Alarm, Volt-Free Contact Alarm Connection	Yes

Distributor Information:



Total-Coding

Total Coding
1012 Illinois Avenue | Joplin, MO 64801
417.389.6999 | www.total-coding.com

