

**FOXJET**<sup>®</sup>  
AN ITW COMPANY



# LinxSeries<sup>®</sup> 8900

Continuous InkJet Printing

Inkjet  
Technology by



# 8900, 8910, 8920, 8940

Continuous InkJet Printing


Inkjet Technology by **LINX**

## Features and Benefits:



- **Four models available** to meet your unique high speed continuous inkjet needs
- **10" full color user interface** saves time while creating and editing messages with prompted fields for fast editing and easy message creation
- **Automatic printhead flushing** allows up to 100 starts and stops before recommended cleanings
- **Easi-Change® Service Module** provides up to 13,000 – 18,000 hours of operation between service interventions depending on selected model
- **Simple one-touch fluid cartridge refills** during printing allows for no mess, no tools and no mistakes
- **Extended shutdowns** – up to 3 months without printer flushing or draining between uses

## Dimensions:

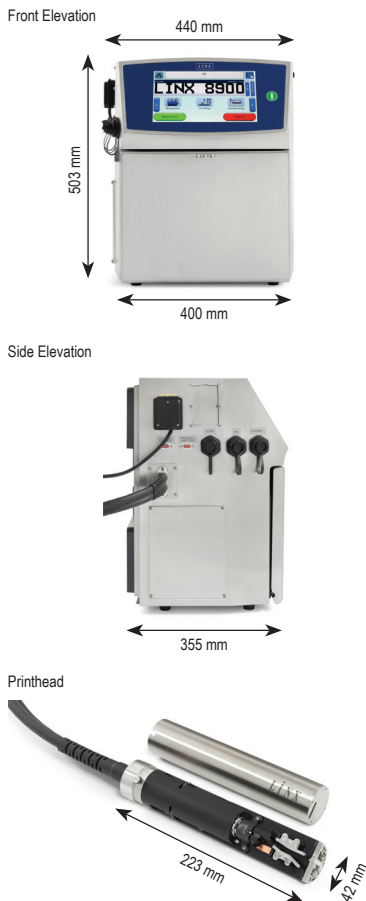

## Printer Specifications:

	8900	8910	8920	8940
<b>Print</b>				
Printhead (2M Conduit Standard)	MK11 Midi			
Printhead - Conduit Options	2M, 4M, 6M			
Max Lines of Print	3	3	5	5
Character Height Range	0.07" - 0.34"	0.07" - 0.34"	0.07" - 0.47"	0.07" - 0.47"
Max Speed Single Line	574 fpm	1,230 fpm	1,230 fpm	1,230 fpm
<b>Ink Range</b>	Dye Based			
Automatic Date Codes, Sequential Numbering/Text	Single Range	Single Range	Multiple Ranges	Multiple Ranges
Timed Messages	Yes			
Graphics/Logo Printing	Yes, imported as bitmap files using USB port			
Barcodes	ITF 2of5, Code 39, Code 128, EAN 13, EAN 8, UPCA, Pharmacode, Data Matrix, QR Code			
Memory Capacity (number of messages)	1000 using internal printer, more can be stored using USB device			
Line Storage Capacity	4 Standard	4 Standard	50 with Customizable Line Names	50 with Customizable Line Names
<b>Connections / Interfacing</b>				
Touch Screen	Yes			
Product Detector	Yes			
Dual alarm output (Volt free and 24v option)	Optional			
USB and Ethernet	Yes			
External single-state alarm output (24v)	Yes			
Shaft Encoder/ Second Product Detector	Yes			
<b>Service</b>				
Easi-Change® Service Module Change Interval	Up to 18 Months (13,000 hours)	Up to 18 Months (13,000 hours)	Up to 24 months (18,000 hours)	Up to 24 months (18,000 hours)
Printhead Cleaning Interval	Up to 3 Months (100 starts and stops)			
On-Screen Fluid Level Indicator	12 Hour Advance Warning			
Advanced System Monitoring	No	No	Yes	Yes
<b>Other</b>				
Ingress Protection Rating	IP55	IP55	IP55	IP65
Base and Enclosure	Stainless Steel			
Operating Temperature Range	41-113°F (32-122°F for Linx 1240 Ink Type)			
Humidity Range	90% Max			
Power Supply	100-230V 50/60 Hz			
Power Consumption	38W (typical when printing)			
Weight	53 lbs			
Regulatory Approvals	GS, CE, EAC, NRTL, FCC			

## Distributor Information:



Total Coding  
1012 Illinois Avenue | Joplin, MO 64801  
417.389.6999 | [www.total-coding.com](http://www.total-coding.com)



1 Research Park Drive • St. Charles, Mo 63304  
Ph: 800.369.5384 • [www.foxjet.com](http://www.foxjet.com) • [info@foxjet.com](mailto:info@foxjet.com)

[www.foxjet.com](http://www.foxjet.com)  
[youtube.com/itwfoxjet](https://youtube.com/itwfoxjet)